
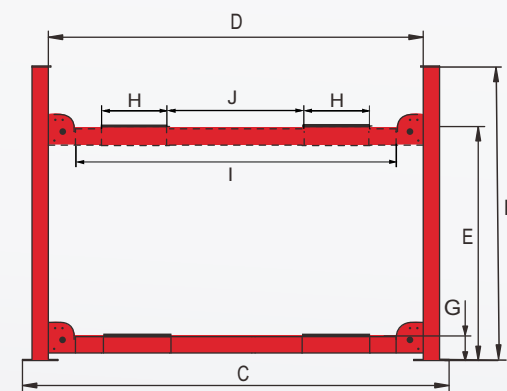


SPECIFICATIONS

Model		PRO-12	PRO-12A	PRO-12AX
Style		Non-Alignment	Alignment	Alignment
Lifting Capacity		12,000lbs(5500kg)	12,000lbs(5500kg)	12,000lbs(5500kg)
Lifting Time		63S	63S	63S
Overall Length (Inc. Ramps)	A	236 5/8" (6012mm)	236 5/8" (6012mm)	236 5/8" (6012mm)
Overall Length(No Inc. Ramps)	B	200 3/4" (5100mm)	200 3/4" (5100mm)	200 3/4" (5100mm)
Overall Width	C	126 1/4" (3208mm)	126 1/4" (3208mm)	132 1/8" (3356mm)
Width Between Posts	D	112 1/4" (2852mm)	112 1/4" (2852mm)	118 1/8" (3000mm)
Lifting Height	E	73 1/2" (1865mm)	75 3/8" (1915mm)	75 3/8" (1915mm)
Overall Height	F	86" (2185mm)	86" (2185mm)	86" (2185mm)
Minimum Height	G	6 5/8" (170mm)	8 5/8" (220mm)	8 5/8" (220mm)
Runway Width	H	20" (508mm)	20" (508mm)	20" (508mm)
Drive-Thru Clearance	I	99 1/4" (2520mm)	98 3/8" (2500mm)	104 1/8" (2646mm)
Width Between Runways	J	43 1/4" (1100mm) Max. 51 1/8" (1300mm)	43 1/4" (1100mm) Max. 51 1/8" (1300mm)	43 1/4" (1100mm) Max. 53 3/4" (1365mm)
Min. Four Wheel Align	K	/	78 3/4" (2000mm)	78 3/4" (2000mm)
Max. Four Wheel Align	L	/	155 7/8" (3960mm)	155 7/8" (3960mm)
Max. Two Wheel Align	M	/	161 3/8" (4100mm)	161 3/8" (4100mm)
Gross Weight		2,337lbs(1060kg)	2,901lbs(1316kg)	2,912lbs(1321kg)
Motor		2.0HP,220V/60Hz,single phase		

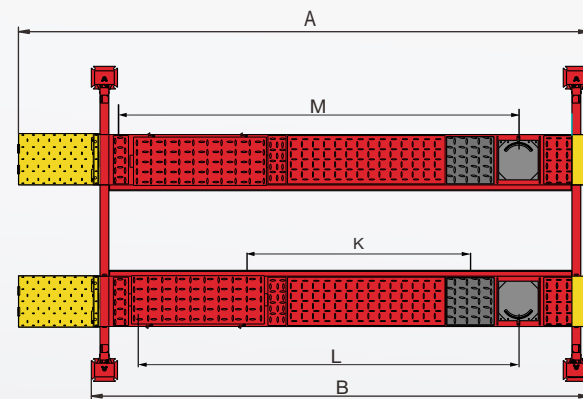

FOUR POST
COMMERCIAL LIFT

The perfect choice with the combination of performance and reliability for your commercial service.




Optional Rolling Jack

J6H: manual hydraulic type 6,000lbs(2,800kg)
J6A: pneumatic hydraulic type 6,000lbs(2,800kg).


FOUR POST COMMERCIAL LIFT

With great performance, this is the perfect lift to meet the needs of garage and shop owners.


- ✓ 12,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed.;
- ✓ The width of platform is 508mm(20") and adjustable width between two platforms can be maximum 1300mm(51 1/8").
- ✓ Optional Rolling Jacks:
J6H 6,000lbs manual pump;
J6A 6,000lbs pneumatic pump;
- ✓ More choices:
Optional led lights Kits No.: 40102001;
Optional extension Kits No.: 41203;
Optional air line Kits No.: 40102.

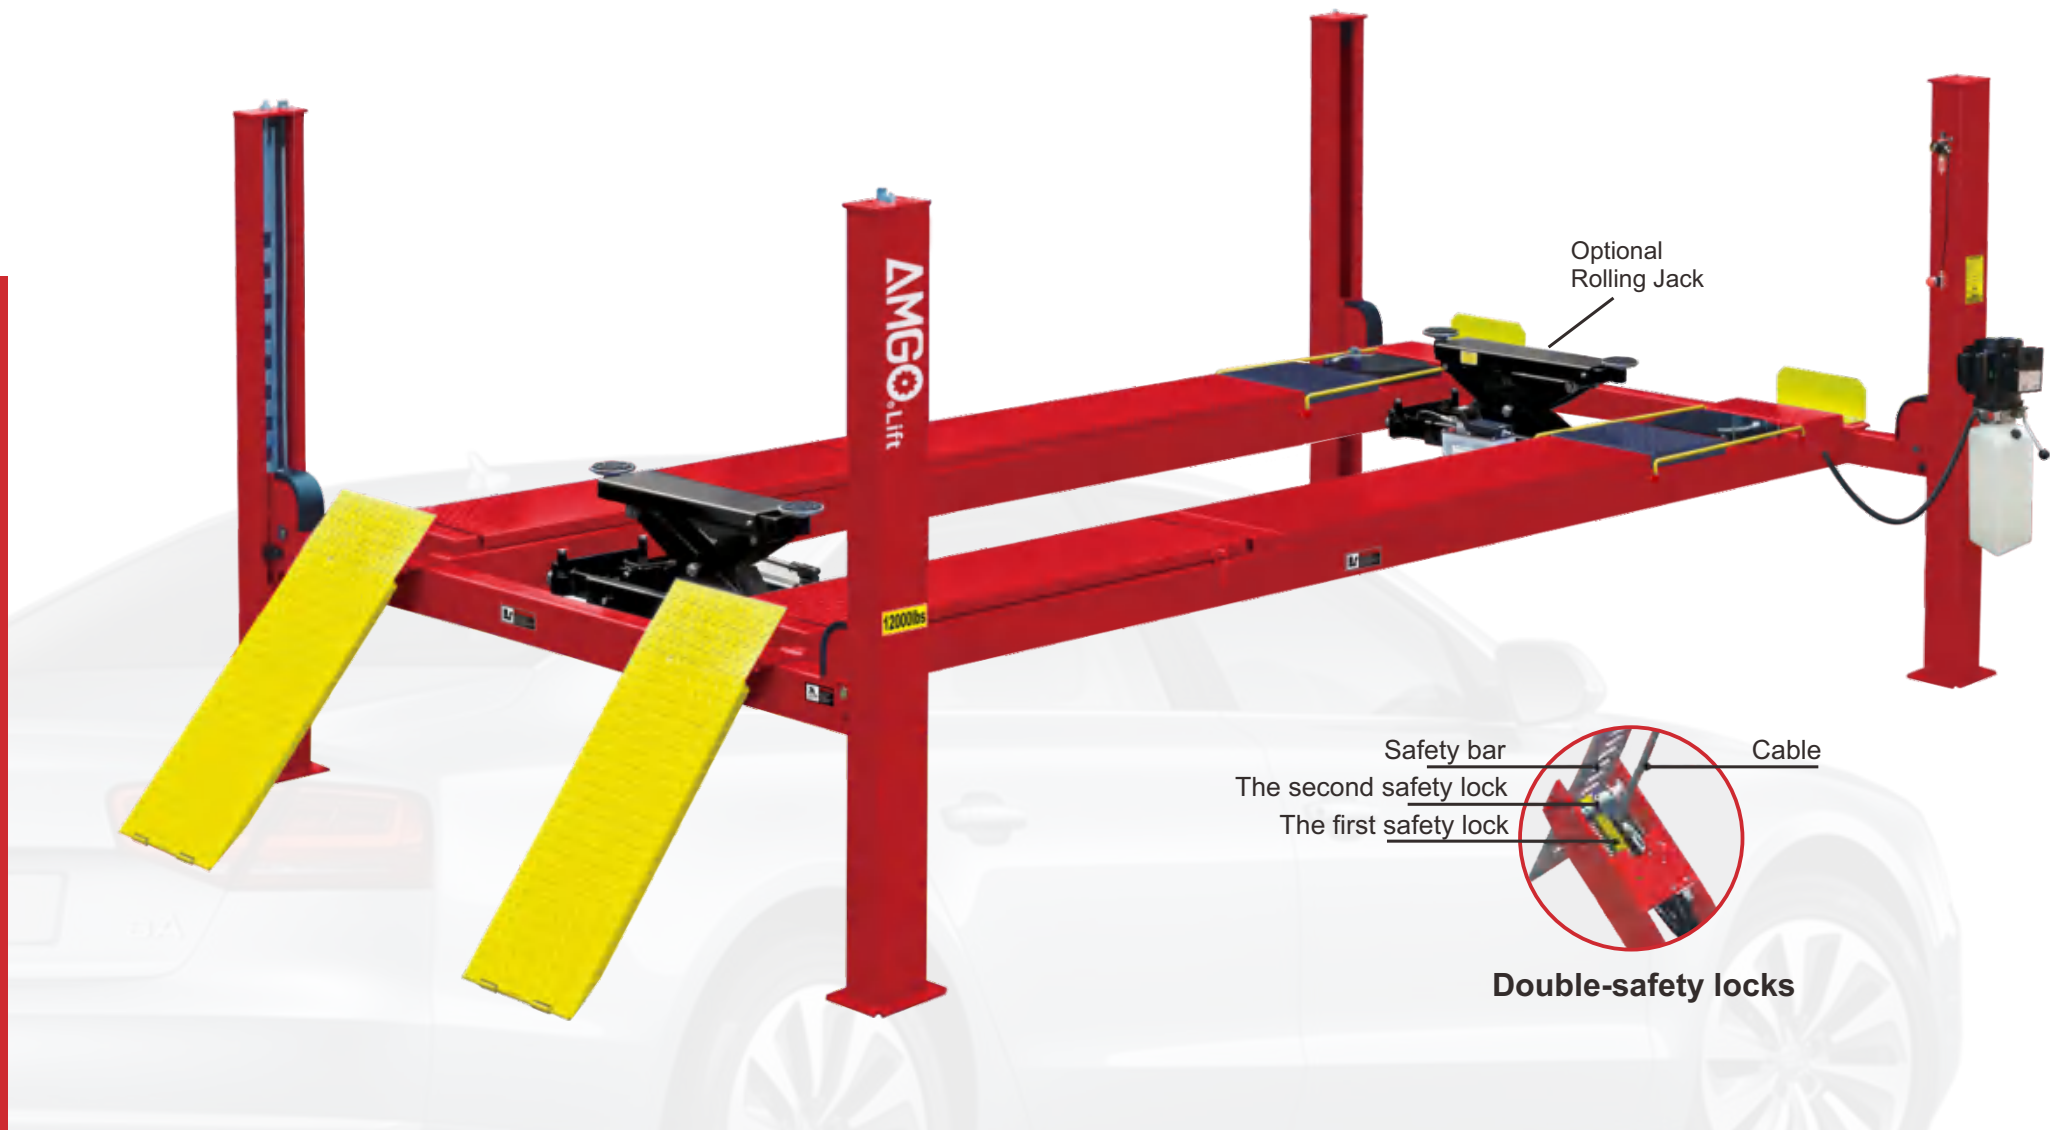

FEATURES

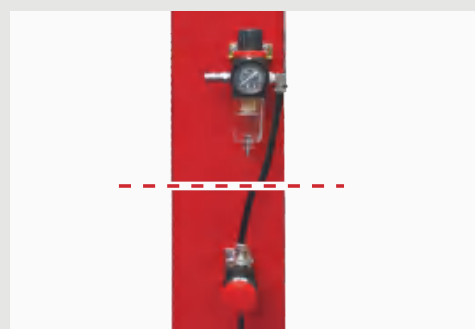


- Air controlled safety device.

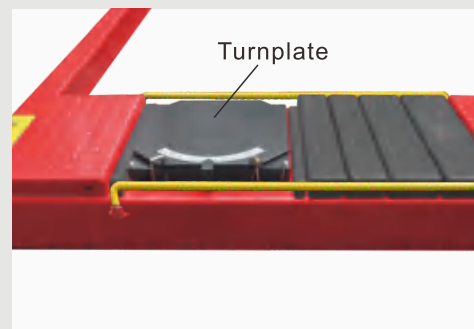


- Adjustable turnplates blocks for the PRO-12A. Optional turnplate. Kits No.: 40101



- New rear-slip ball sets. Optional LED light kits is fitted for every model of AMGO 4-post lifts. LED Kits No.:40102001

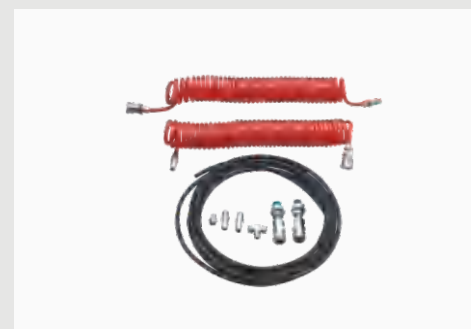

- Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories. Kits No.:40102

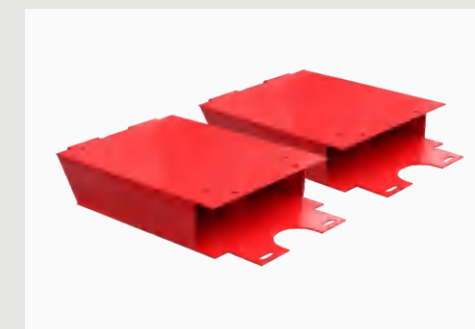

- Optional length extension kits adds an extra 26" (660mm) length to the platform. Kits No.: 41203.



- Optional adjustable blocks for alignment 4 post lift. Kits No.: 40905 (used with kits 41203)