
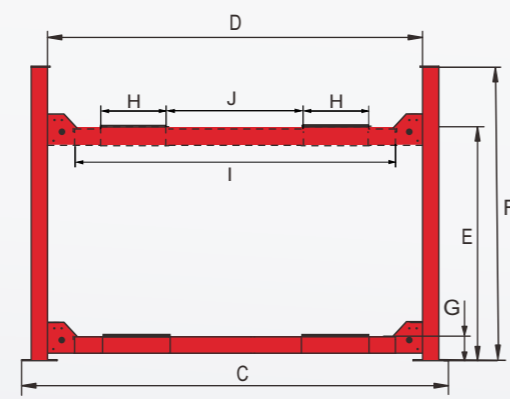


**SPECIFICATIONS**

Model		PRO-30	PRO-30E	PRO-40	PRO-40E
Lifting Capacity		30,000lbs(13600kg)	30,000lbs(13600kg)	40,000lbs(18000kg)	40,000lbs(18000kg)
Lifting Time		130S	130S	176S	176S
Overall Length (Inc.Ramps)	A	307 1/8" (7800mm)	366 1/8" (9300mm)	366 1/8" (9300mm)	425 1/8" (10800mm)
Overall Length(No.Ramps)	B	256 1/2" (6514mm)	315 1/2" (8014mm)	315 1/2" (8014mm)	374 1/2" (9514mm)
Overall Width	C	149 3/8" (3794mm)	149 3/8" (3794mm)	161 3/8" (4100mm)	161 3/8" (4100mm)
Width Between Columns	D	131 3/4" (3348mm)	131 3/4" (3348mm)	143 7/8" (3654mm)	143 7/8" (3654mm)
Lifting Height	E	74 3/4" (1900mm)	74 3/4" (1900mm)	75" (1905mm)	75" (1905mm)
Overall Height	F	87 7/8" (2232mm)	87 7/8" (2232mm)	87 7/8" (2232mm)	87 7/8" (2232mm)
Minimum Height	G	10 1/2" (265mm)	10 1/2" (265mm)	10 5/8" (270mm)	10 5/8" (270mm)
Runway width	H	24" (610mm)	24" (610mm)	28" (710mm)	28" (710mm)
Drive-Thru Clearance	I	108 3/8"(2992mm)	108 3/8"(2992mm)	129 7/8"(3298mm)	129 7/8"(3298mm)
Width Between Runways	J	54 3/4"(1390mm)	54 3/4"(1390mm)	58 7/8"(1496mm)	58 7/8"(1496mm)
Gross Weight		5,406lbs(2,452kg)	6,579lbs(2,984kg)	5,815lbs(2,638kg)	6,856lbs(3,110kg)
		2.0HP, 220V/60Hz, single phase			

FOUR POST  
**TRUCK LIFT**

*AMGO's Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.*

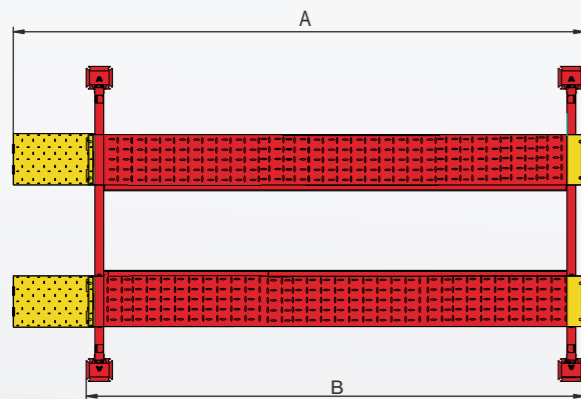

**AMGO HYDRAULIC CORPORATION**

1931 Joe Rogers Jr Blvd, Manning, SC 29102, USA  
Tel:(803)505-6410 www.amgohyd.com


# FOUR POST TRUCK LIFT

*AMGO's powerful four-post models provide a generous 30,000 - 40,000 lbs lifting capacity and features extra wide runways to accommodate a wide variety of vehicle types. With a double locking safety device, heavy duty design, built to last manufacturing technology, and over 6 ft of unrestricted under vehicle access*

- ✓ 30,000 lbs & 40,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø3/4" aircraft quality synchronization cable;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards using high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant speed;
- ✓ Optional Rolling Jacks:  
RJ-20A 20,000lbs capacity with pneumatic pump.



## FEATURES

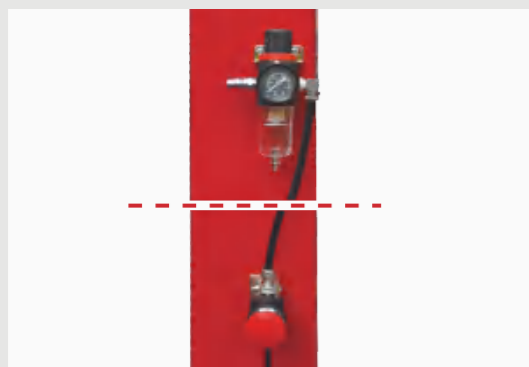


• Air controlled safety device.



• Optional Rolling Jacks:  
RJ-20A 20,000lbs



• Optional LED lighting.  
Kits No.: 40102001

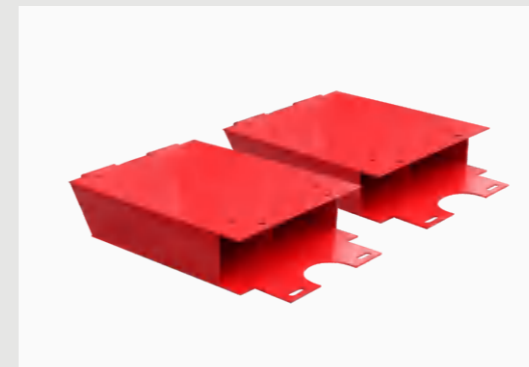

• Optional length extension kits adds an extra 29" (737mm) length on the platform.  
Kits No.: 43001(PRO-30)  
Kits No.: 44001(PRO-40)



• Optional airline kits. Easy to install with all models of rolling jacks with pneumatic pump accessories.  
Kits No.: 40106