


FULL RISE SCISSOR SMART LIFT

AMGO Full Rise Scissor Lift is the perfect choice for raising the vehicle high enough to walk underneath but limited bay space width.

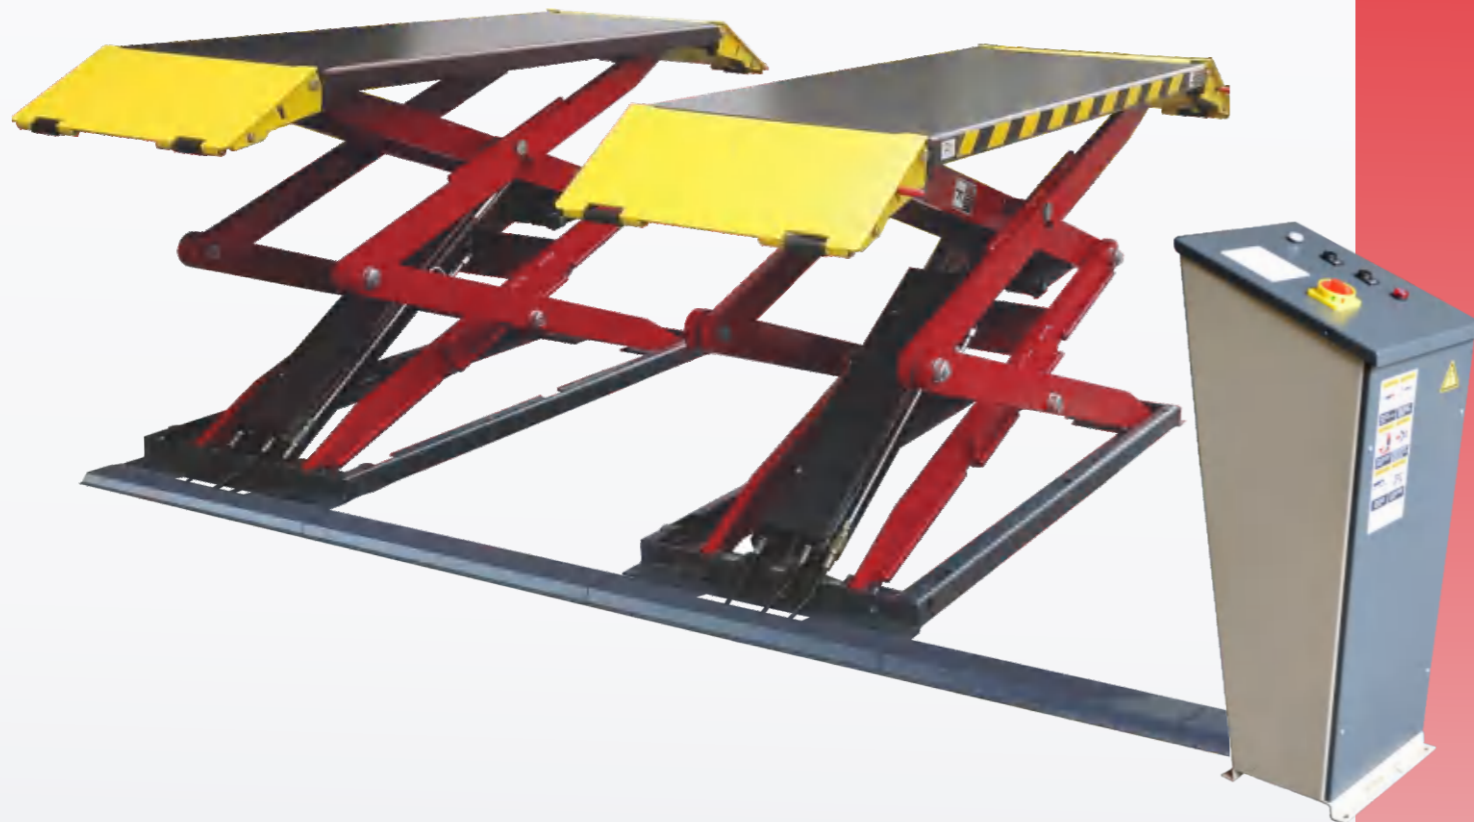

Main Features

- ✓ 24V control system for safety operation.
- ✓ 2-Dual synchronous cylinders are applied to assure the lifting level on both platforms.
- ✓ Hydraulic cylinders built with hoses burst valves for safety protection.
- ✓ Both mechanical and hydraulic lock system. It might be the safest small scissor lift in the world.
- ✓ The safety stop device at the height of 11 7/8"(300mm), both control buttons are needed to lower down the lift from 11 7/8"(300mm) to ground with tone alarm for safety.




Both mechanical and hydraulic locks.



Adjustable ramps and extended platform for longer vehicles.



Both 1 1/2" and 3" height rubber pads included as standard supply.




Low profile design, the closed height is only 4 1/2"(115mm).



Optional Leveling Kit. Recommended for heavier vehicles with narrow or wider frames. Kits No.:SX703

SPECIFICATIONS

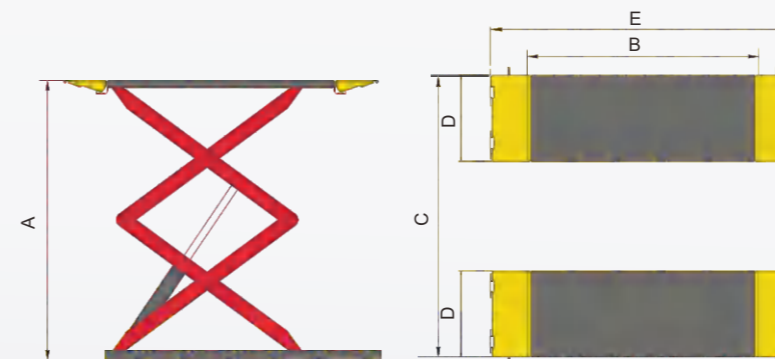

| | | |
|---------------------------|-------------------------------|------------------|
| Model | XL-7 | |
| Lifting Capacity | 7,000lbs (3000kg) | |
| Lifting Time | 41 S | |
| Lifting Height | A1 | 78 3/4" (2000mm) |
| Minimum Height | A2 | 4 1/2" (115mm) |
| Runway Length | B | 57 3/8" (1458mm) |
| Overall Width | C | 76 3/4" (1950mm) |
| Runway Width | D | 23 5/8" (600mm) |
| Overall Length(Inc Ramps) | E | 79 7/8" (2028mm) |
| Motor | 2.0HP,220V/60Hz, single phase | |
| Gross Weight | 1,898 lbs (861kg) | |

AMGO HYDRAULIC CORPORATION

1931 Jo Rogers Jr Blvd, Manning, SC 29102, USA
Tel: (803) 505-6410 www.amgohyd.com