(I-9

FULL RISE SCISSOR

FLUSH-MOUNT LIFT

AMGO's flush-mount scissor lift is designed to fit nicely into narrow bays and won't take up much of your precious floor space.



SCISSOR LIFT

Main Features

- √ Features an electric/hydraulic power system.
- ✓ Dual synchronous cylinders assure even lifting on both platforms.
- ✓ Platforms are designed to be extended. It can be adjusted for any car type.
- \checkmark The automatic safety device is operated by air cylinders.
- ✓ Electro-air control cabinet.
- ✓ With hydraulic equalization, there's no need for a torsion bar.



Automatic safety release.



Extended platforms.



Strong tubing makes the lift safer and more durable than the competition.




Leveling bar kits No.: SX703



Mechanical Safety Locks.

SPECIFICATIONS

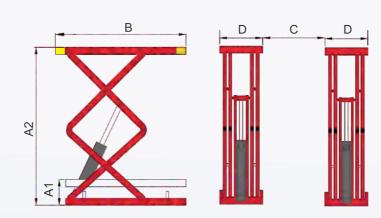

Model		XL-9F
Lifting Capacity		9,000lbs(4000kg)
Lifting Time		49 S
Minimum Height	A1	13 3/4" (350mm)
Lifting Height	A2	87 3/4" (2230mm)
Overall Length	В	65-80 3/4" (1650-2050mm)
Width Between Runways	С	31 1/2"(800mm)
Runway Width	D	21 5/8" (550mm)
Overall Width		74 3/4" (1900mm)
Motor		2.0HP,220V/60Hz,single phase
Gross Weight		2,013 lbs(913kg)

AMGO HYDRAULIC CORPORATION

1931 Jo Rogers Jr Blvd,Manning,SC 29102,USA Tel:(803)505-6410 www.amgohyd.com

